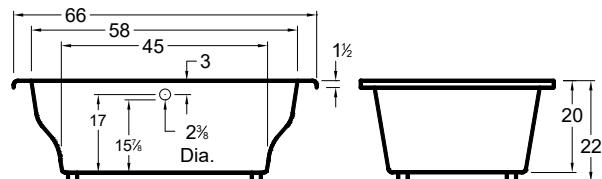
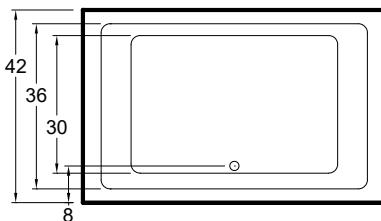


Always check our website for the most updated specifications: [www.zumacollection.com](http://www.zumacollection.com)


Pictured with optional waste and overflow


 All bathtub dimensions are  $\pm 1/2"$ .

#### CODES AND COMPLIANCE

Products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

#### ELECTRICAL REQUIREMENTS

We recommend one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

#### DIMENSIONS


66" x 42" x 22"

Whirlpool Operating Gallons: 61


Gallons to Overflow: 98

Material: Acrylic


### Whirlpool



### Combination (pump and blower location only)



### Airbath System II



LEGEND: P SYLLENT PUMP B BLOWER JET

SUCTION — ACCESS PANEL (MINIMUM 16" X 20")

#### O P T I O N A L A C C E S S O R I E S

- Apron
- Chromotherapy Light
- Grab Bars
- High Density Insulation
- iBath Sound System
- Lo-Profile Tub Edge
- Ozone System  
(Whirlpool and/or Airbath only)
- Pillow -12" - Angle
- Rotary Jets
- Thermal Comfort System  
(TCS must be used at opposite end if used with VSM)
- Tile Flange Kit
- Trim Kit Upgrade
- Vibro Sonic Massage  
(VSM must be used at opposite end if used with TCS)
- Waste & Overflow
- Linear Overflow

#### INSTALLATION TIPS

- Install product according to Owners manual and local codes.
- All whirlpool or Airbath® units require an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Dimensions for undermount installations should be taken directly from the bathtub.
- Cut-out dimensions: 64" x 40"

Undermount Yes  No