





Always check our website for the most updated specifications: [www.zumacollection.com](http://www.zumacollection.com)



Pictured with optional waste and overflow

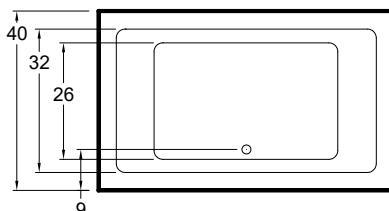

All bathtub dimensions are  $\pm 1/2"$ .

#### **CODES AND COMPLIANCE**

Products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

#### **ELECTRICAL REQUIREMENTS**

We recommend one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

#### **DIMENSIONS**


66" x 40" x 23"

Whirlpool Operating Gallons: 58


Gallons to Overflow: 95

Material: Polymer Composite


#### **Whirlpool**



#### **Combination** (pump and blower location only)



#### **Airbath System II**



#### **O P T I O N A L A C C E S S O R I E S**

**Chromotherapy Light**

**Grab Bars**

**High Density Insulation**

**Pillow -12" - Angle**

**Rotary Jets**

**Thermal Comfort System**


*(TCS must be used at opposite end if used with VSM)*

**Vibro Sonic Massage**

*(VSM must be used at opposite end if used with TCS)*

**Waste & Overflow**

**Linear Overflow**



#### **INSTALLATION TIPS**

- Install product according to Owners manual and local codes.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Access panel for whirlpool and Airbath® systems included with the CDF.