



Always check our website for the most updated specifications: [www.zumacollection.com](http://www.zumacollection.com)



Pictured with optional waste and overflow

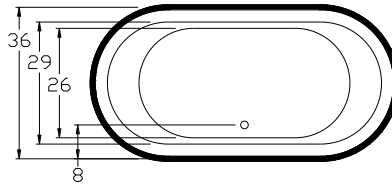

All bathtub dimensions are  $\pm 1/2"$ .

### CODES AND COMPLIANCE

Products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

### ELECTRICAL REQUIREMENTS

We recommend one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### DIMENSIONS


72" x 36" x 22<sup>1</sup>/<sub>2</sub>"

Whirlpool Operating Gallons: 57


Gallons to Overflow: 87

Material: Acrylic


### Whirlpool



### Combination (pump and blower location only)



### Airbath System II



LEGEND:	P SYLLENT PUMP	B BLOWER	JET
	SUCTION	ACCESS PANEL (MINIMUM 16" X 20")	

### OPTIONAL ACCESSORIES

- Chromotherapy Light
- Grab Bars
- High Density Insulation
- iBath Sound System
- Lo-Profile Tub Edge
- Ozone System  
*(Whirlpool and/or Airbath only)*
- Pillow -12"
- Rotary Jets
- Thermal Comfort System  
*(TCS must be at opposite end if used with VSM)*
- Trim Kit Upgrade
- Vibro Sonic Massage  
*(VSM must be at opposite end if used with TCS)*
- Waste & Overflow
- Linear Overflow

Undermount Yes  No

### INSTALLATION TIPS

- Install product according to Owners manual and local codes.
- All whirlpool or Airbath<sup>®</sup> units require an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Dimensions for undermount installations should be taken directly from the bathtub.
- Cut-out dimensions: Zuma recommends you wait until you have the actual unit or contact us for a template.