


Always check our website for the most updated specifications: [www.zumacollection.com](http://www.zumacollection.com)

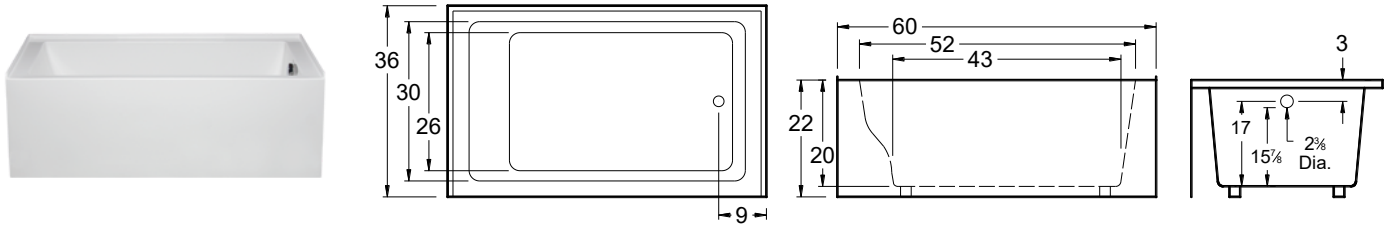

All bathtub dimensions are  $\pm 1/2$ ".

### CODES AND COMPLIANCE

Products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

### ELECTRICAL REQUIREMENTS

We recommend one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### DIMENSIONS


60" x 36" x 22"

Whirlpool Operating Gallons: 48


Gallons to Overflow: 75

Material: Acrylic (White & Biscuit Only)


### Whirlpool



### Combination (pump and blower location only)



### Airbath System II



### OPTIONAL ACCESSORIES

Chromotherapy Light

Grab Bars

High Density Insulation

iBath Sound System

Ozone System

*(Whirlpool and/or Airbath only)*

Pillow -12" - Angle

Rotary Jets

Thermal Comfort System

*(TCS can not be used with VSM)*

Trim Kit Upgrade


Vibro Sonic Massage

*(VSM can not be used with TCS)*

Waste & Overflow upgrade:

Cable Drive Waste & Overflow

Linear Overflow

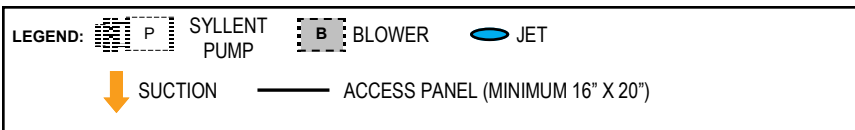

Undermount Yes  No

### INSTALLATION TIPS

- Install product according to Owners manual and local codes.
- All whirlpool or Airbath<sup>®</sup> units require an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Dimensions for undermount installations should be taken directly from the bathtub.
- Cut-out dimension: 58" x 28"