


Always check our website for the most updated specifications: www.zumacollection.com

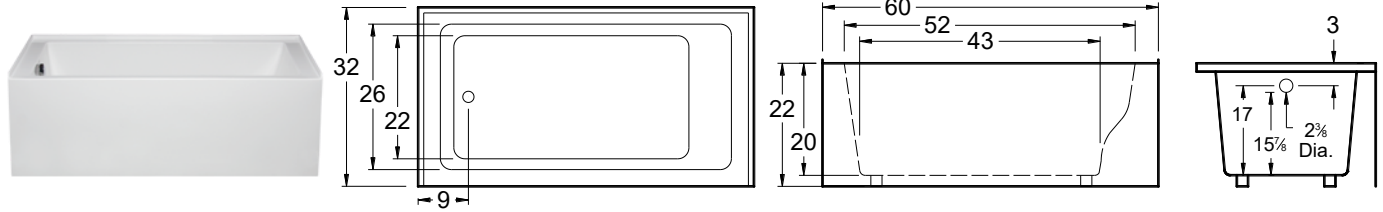

All bathtub dimensions are $\pm 1/2"$.

CODES AND COMPLIANCE

Products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

ELECTRICAL REQUIREMENTS

We recommend one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

DIMENSIONS


60" x 32" x 22"

Whirlpool Operating Gallons: 43


Gallons to Overflow: 68

Material: Acrylic (White & Biscuit Only)


Whirlpool



Combination (pump and blower location only)



Airbath System II



OPTIONAL ACCESSORIES

Chromotherapy Light

Grab Bars

High Density Insulation

iBath Sound System

Ozone System

(Whirlpool and/or Airbath only)

Pillow -12" - Angle

Rotary Jets

Thermal Comfort System

(TCS can not be used with VSM)

Trim Kit Upgrade

Vibro Sonic Massage

(VSM can not be used with TCS)

Waste & Overflow upgrades:

Cable Drive Waste & Overflow

Linear Overflow

LEGEND:

P	SYLLENT PUMP	B	BLOWER		JET
	SUCTION		ACCESS PANEL (MINIMUM 16" X 20")		

Undermount

Yes

No

INSTALLATION TIPS

- Install product according to Owners manual and local codes.
- All whirlpool or Airbath[®] units require an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Dimensions for undermount installations should be taken directly from the bathtub.
- Cut-out dimension: 58" x 28"